



Design Guidelines for

LANmark-7

and

LANmark-7A

Cabling System

Technical Paper
Nexans Cabling Solutions
June 2008 - Revision 1.0

Table of Contents

1	<u>Introduction</u>	3
2	<u>Standards Compliance</u>	3
3	<u>Length Considerations for installation according to cabling standards</u>	4
3.1	Length specifications	4
3.2	Stranded Cable Length Compensation	4
3.3	Permanent Link Length Installation Guidelines	6
3.3.1	2 Connector Link Installation Guidelines	6
3.3.2	3 Connector Link Installation Guidelines	7
3.4	Channel Installation Guidelines	8
3.4.1	2 Connector Channel Installation Guidelines	8
3.4.2	3 Connector Channel Installation Guidelines	9
3.4.3	4 Connector Channel Installation Guidelines	11

1 Introduction

The following design guidelines cover the maximum and minimum length restrictions for installing a Nexans LANmark-7 or LANmark-7A structured cabling system.

2 Standards Compliance

All installations must follow industry best practice and demonstrate compliance to the relevant sections of ISO/IEC 11801 or EN 50174 series of documents and shall be tested according to ISO/IEC 11801:2002/A1:2008 requirements. For more details refer to the 'LANmark-7-7A Field Test Procedure'.

3 Length Considerations for installation according to cabling standards

3.1 Length specifications

The following minimum and maximum length specifications apply according to international standards:

Table 1 - Minimum and Maximum length (*)

Segment	Minimum m	Maximum m
FD-CP	15	85
CP-TO	5	-
FD-TO (no CP)	15	90
Work area cord	2	5
Patch cord	2	-
Equip cord	2	5
All cords	-	10

(*) Source: Table 31 of ISO/IEC 11801:2002/A1:2008

Whereas the maximum length is given as a normative requirement, minimum length is an informative requirement and is given to indicate which length limitations were assumed when the component and link limits for electrical performance have been selected. It is recognized that short links with a high number of connection points at close proximity do generate more internal crosstalk and reflections. This is valid for all frequencies above 250 MHz and therefore does apply especially for cabling systems up to 600MHz and 1000MHz.

3.2 Stranded Cable Length Compensation

The attenuation of the flexible stranded cable is higher than the solid horizontal cable, therefore the maximum length of the permanent link must be reduced accordingly. The maximum link length = 90 m of solid horizontal cable. For every 1 m of additional flexible cable (above the 10m calculated for patchcords already) used between the Consolidation Point and the Telecommunications Outlets, the horizontal cable must be reduced by 1,5 m (see table).

Following table shows the length calculation taking in consideration the length of each portion of the channel:

Table 2 - Horizontal link length equations

Model	Figure	Implementation Equations		
		Class D channels	Class E and E _A channels	Class F and F _A channels
Interconnect - TO	12a	$H=109 - FX$	$H = 107 \cdot 3^{\alpha} - FX$	$H = 107 \cdot 2^{\alpha} - FX$
Cross-connect - TO	12b	$H=107 - FX$	$H = 106 \cdot 3^{\alpha} - FX$	$H = 106 \cdot 3^{\alpha} - FX$
Interconnect - CP - TO	12c	$H=107 - FX - CY$	$H = 106 \cdot 3^{\alpha} - FX - CY$	$H = 106 \cdot 3^{\alpha} - FX - CY$
Cross-connect - CP - TO	12d	$H=105 - FX - CY$	$H = 105 \cdot 3^{\alpha} - FX - CY$	$H = 105 \cdot 3^{\alpha} - FX - CY$

- H the maximum length of the fixed horizontal cable (m)
- F combined length of patch cords/jumpers, equipment and work area cords (m)
- C the length of the CP cable (m)
- X the ration of cord cable insertion loss (dB/m) to fixed horizontal cable insertion loss (dB/m) - see Clause 9
- Y the ration of CP cable insertion loss (dB/m) to fixed horizontal cable insertion loss (dB/m) - see Clause 9



NOTE For operating temperatures above 20°C, H should be reduced by 0.2% per °C for screened cables; 0.4% per °C (20°C to 40°C) and 0.6% per °C (>40°C to 60°C) for unscreened cables.

^a This length reduction is to provide an allocated margin to accomodate insertion loss deviation.

3.3 Permanent Link Length Installation Guidelines



The following length restrictions apply to LANmark-6A products only. In case Cross Connects and Consolidation Points are used, LANmark-6A Ultim patchcords series have to be used to build the CC or CP links.

3.3.1 2 Connector Link Installation Guidelines

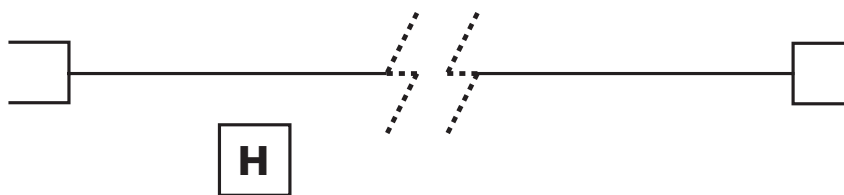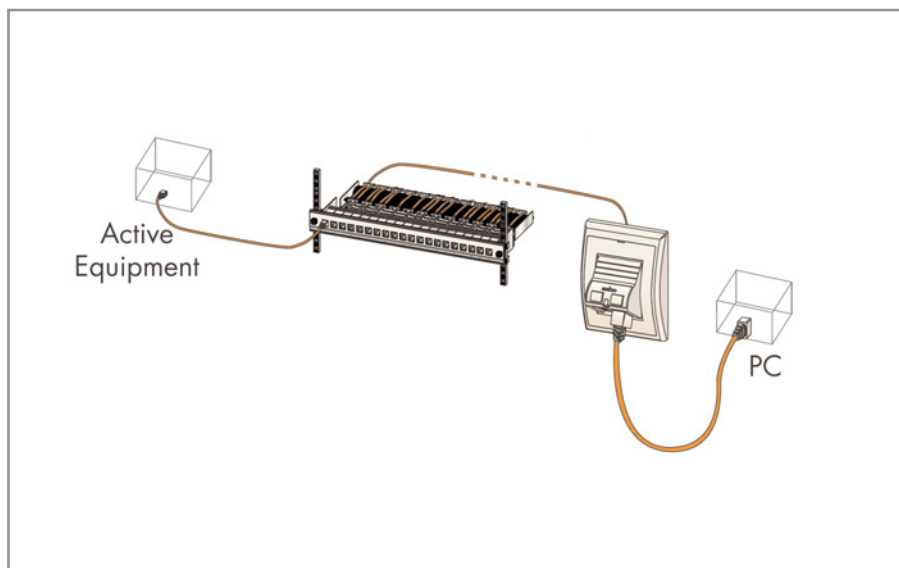

Description	Minimum	Maximum
H Horizontal Permanent Link	15m	90m



3.3.2 3 Connector Link Installation Guidelines

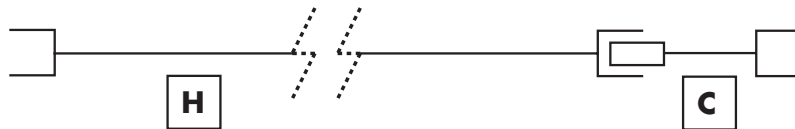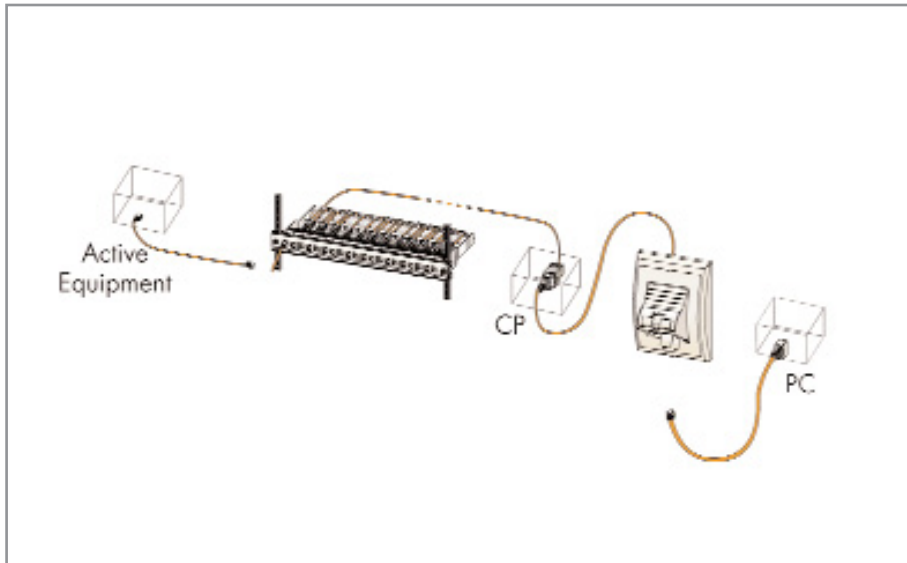

	Description	Minimum	Maximum
H	Horizontal Permanent Link	15m	90m - (C*1.5)
C	Consolidation Point	5m	20m
H + C	Total Link Length	15 + 5 = 20m	90 - (5*1.5) + 5 = 87.5m

3.4 Channel Installation Guidelines



3.4.1 2 Connector Channel Installation Guidelines

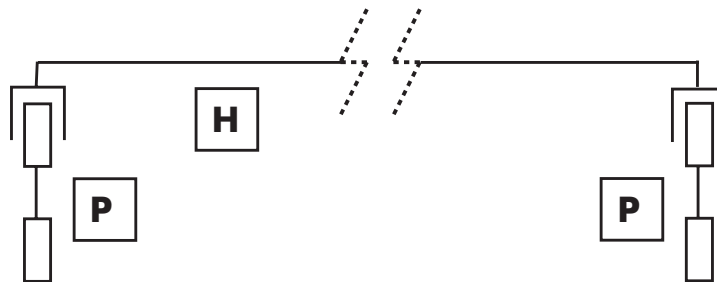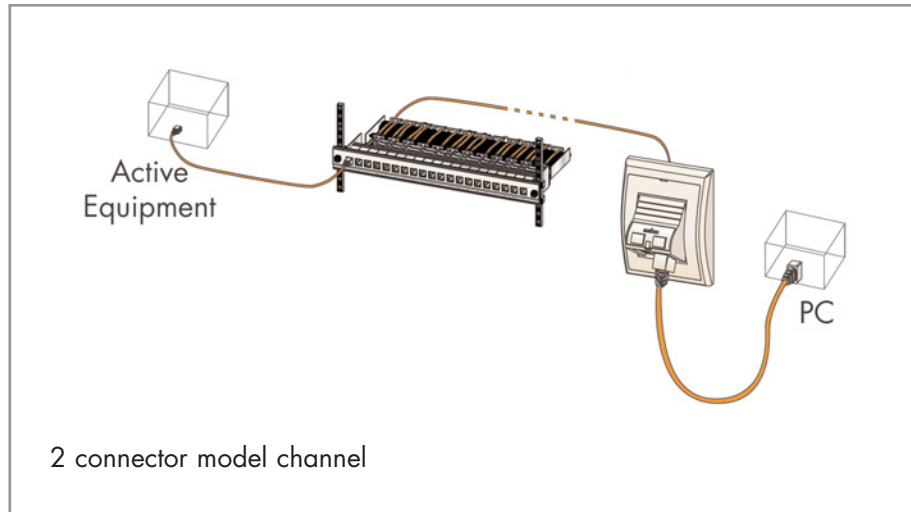

Description		Minimum	Maximum
H	Horizontal Permanent Link	15m	90m
P	Patch cord	2m	5m
H + 2P	Total Channel Length	$15 + 2*2 = 19\text{m}$	$90 + 5*2 = 100\text{m}$



3.4.2 3 Connector Channel Installation Guidelines

3.4.2.1 3 Connector Model Using Cross-Connection

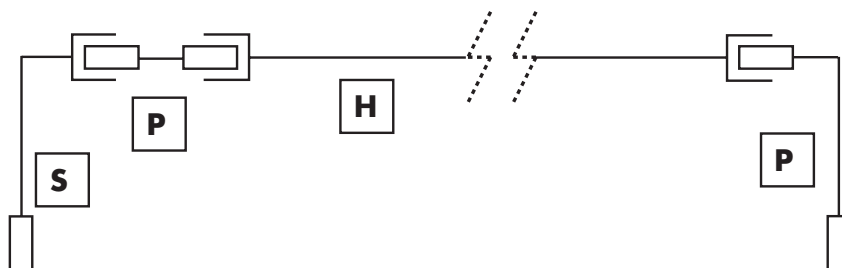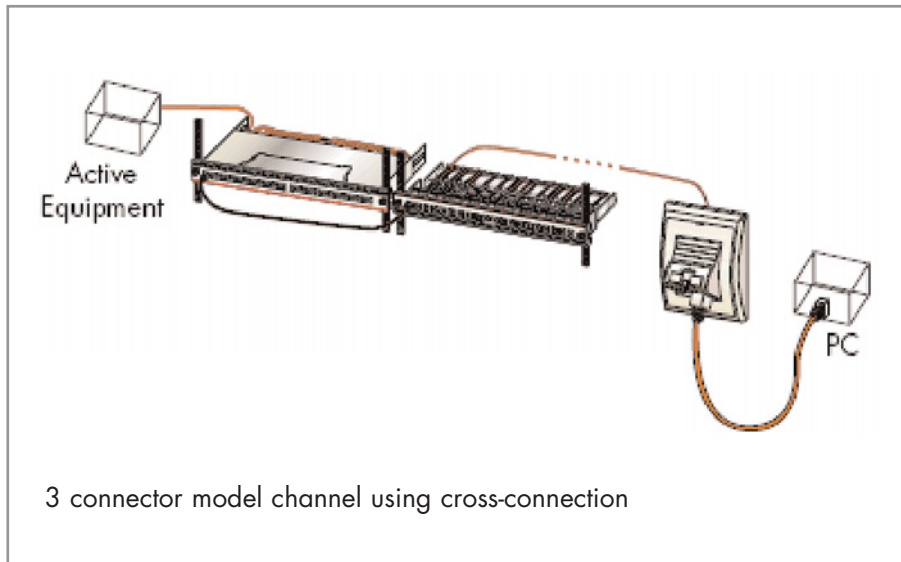



	Description	Minimum	Maximum
H	Horizontal Permanent Link	15m	90m - (S*1.5)
S	Service Presentation / Cross Connect	5m	20m
P	Patch Cord	2m	5m
H+S+2P	Total Channel Length	15 + 5 + 2*2 = 24m	90 - (5*1.5) + 5 + 5*2 = 97.5m

3.4.2.2 3 Connector Model Using Consolidation Point

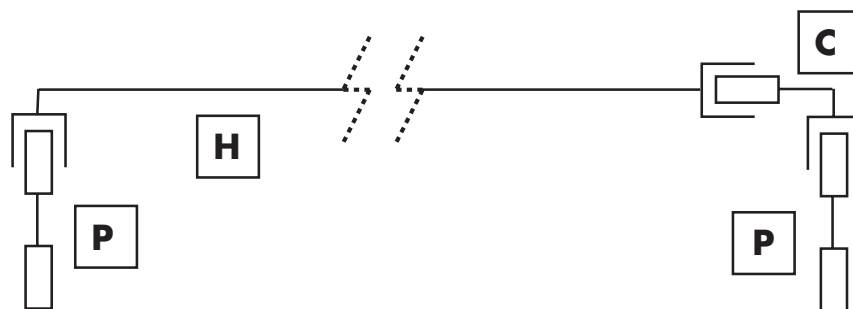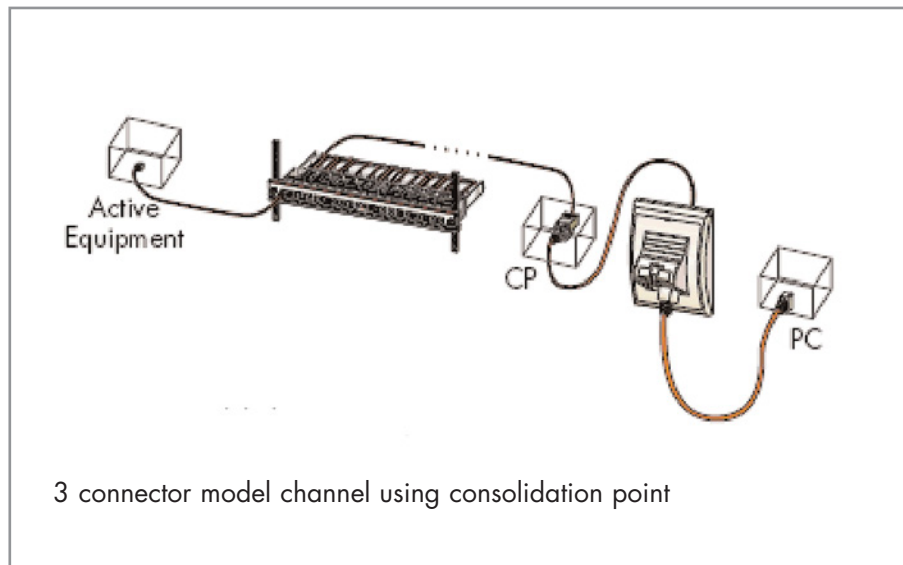

Description		Minimum	Maximum
H	Horizontal Permanent Link	15m	90m - (C*1.5)
C	Consolidation Point	5m	20m
H + C	Total Link Length	15 + 5 = 20m	90 - (5*1.5) + 5 = 87.5m
P	Patch Cord	2m	5m
H+C+2P	Total Channel Length	15 + 5 + 1*2 = 24m	87.5 + 5*2 = 97.5m

3.4.3 4 Connector Channel Installation Guidelines

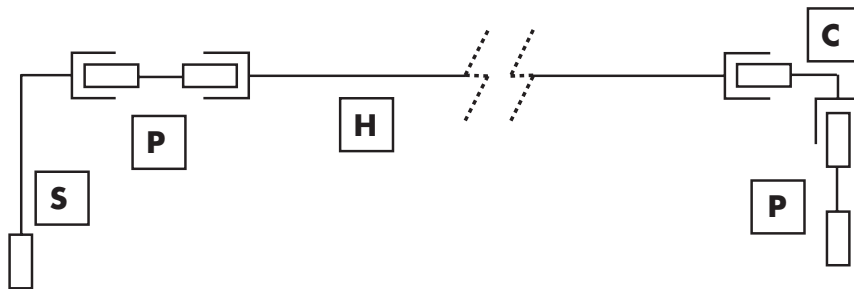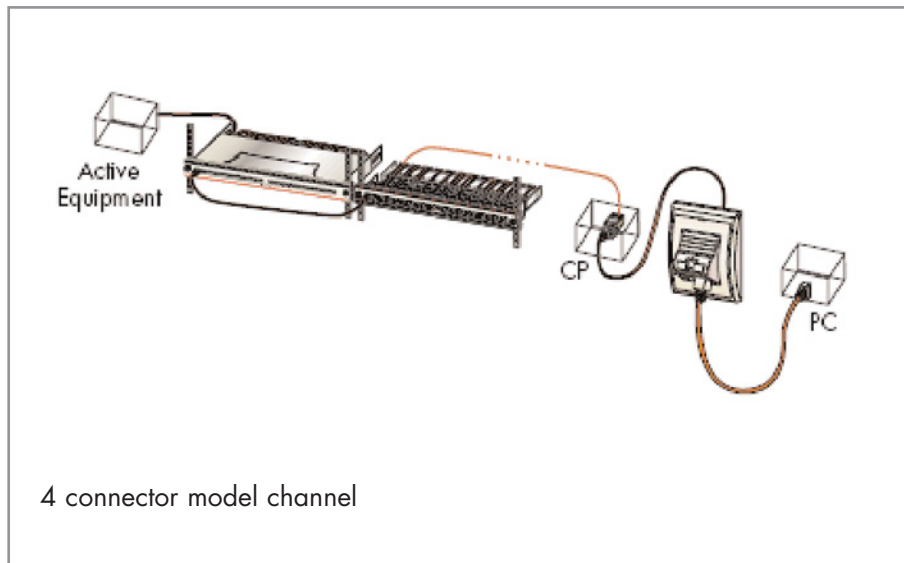

Description		Minimum	Maximum
H	Horizontal Permanent Link	15m	$90m - ((C+S) * 1.5)$
C	Consolidation Point	5m	20m
H + C	Total Link Length	$15 + 5 = 20m$	$90 - ((5+5) * 1.5) + 5 = 80m$
S	Service Presentation / Cross Connect	5m	20m
P	Patch Cord	2m	5m
H+C+S+2P	Total Channel Length	$15 + 5 + 5 + 2 * 2 = 29m$	$80 + 5 + 5 * 2 = 95m$



Global expert in cables and cabling systems

France

Rue Mozart, 4-10
92587 Clichy CEDEX

Tel +33 (0)1 56 69 84 00
Fax +33 (0)1 56 69 86 38

Belgium

Alsebergsesteenweg 2, b3
1501 Buizingen

Tel +32 (0)2 363 38 00
Fax +32 (0)2 365 09 99

UK

2 Faraday Office Park
Faraday Road
Basingstoke RG24 8QG • UK

Tel +44 (0) 845 2300 488
Fax +44 (0) 1256 486650